




TANKASSURE®

This ultra-reliable tank monitoring system sets the new marine and RV standard with an easy-to-read tank level indicator for up to four tanks in one convenient location. You can easily see all tank levels simultaneously via the mobile app.


NEW

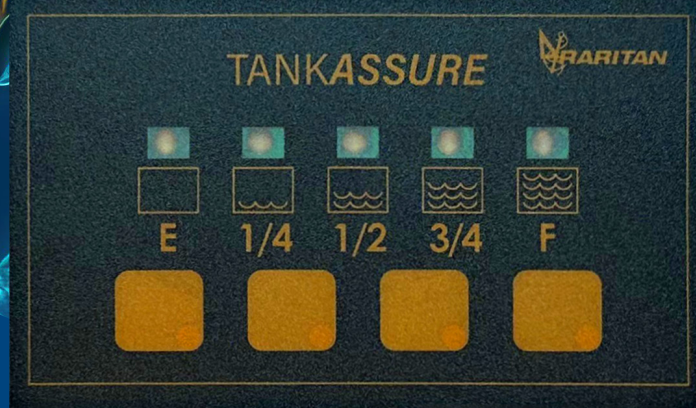

The powerful and recommended monitoring choice is the Raritan TankAssure App. The App allows you to monitor tank capacity wirelessly from anywhere on your vessel. Calibration is a breeze; enter the tank's height value. Unlike the panel monitor, each tank can be labeled directly through the App. The App provides the ability to enable customized alerts, such as Full, Empty, Blocked Vent, and many more. Disconnected from the App, no problem. Your alerts will become Push Notifications, so you are genuinely never disconnected from being able to monitor your tanks.

Advantages that Set TankAssure Apart


- ↓ Reliable electronic design perfected for any marine environment
- ↓ Compatible with any polyethylene, fiberglass, or metal tank
- ↓ Use it to monitor sewage, greywater, and freshwater
- ↓ Integrated Blocked Vent Detector technology helps in quickly diagnosing
- ↓ Seamless connection to the Raritan App, allowing you to monitor tank capacity from anywhere on your vessel
- ↓ Get an exact percentage readout for each tank capacity using the Raritan App

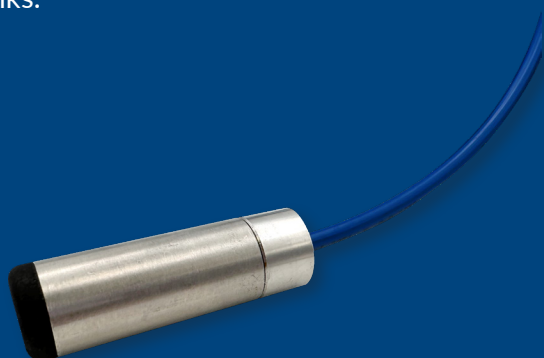


Raritan products are chosen by powerboat, sailboat, houseboat and RV owners and manufacturers the world over for their dependability, environmental responsibility, simplicity of installation, operation and maintenance. The product line includes house-hold style toilets, marine toilets, marine sanitation devices and systems, cleaning products, icemakers, water heaters and rudder angle indicators.

Part Numbers


15600	TankAssure Control Panel with Sensor
15610	TankAssure Sensor Kit
15630	Tankassure NMEA2000 Adapter

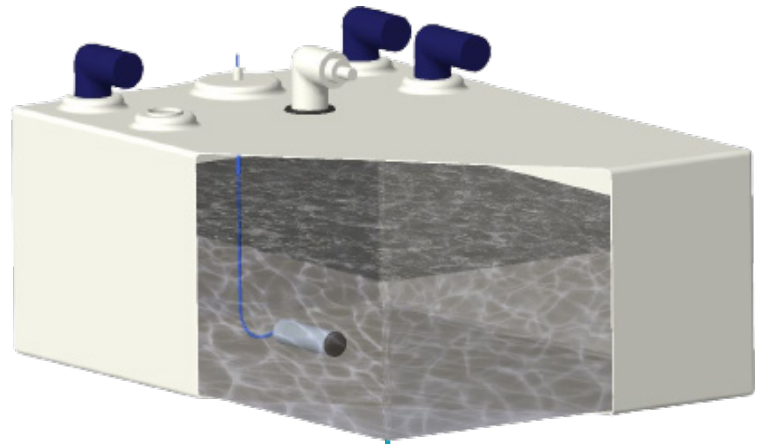


Certified

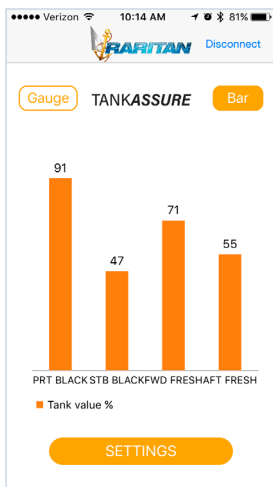


Bar

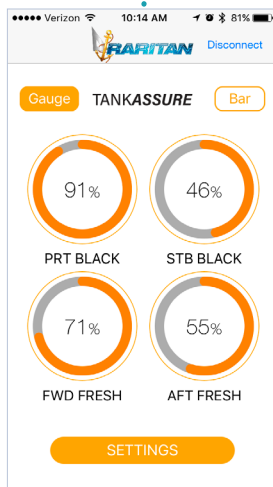

Gauge

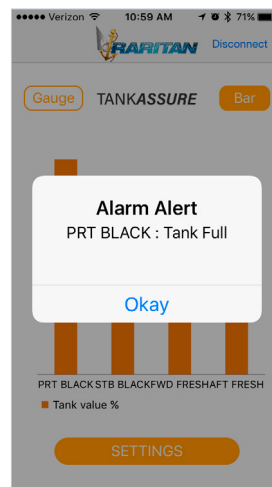

Capacity Alert

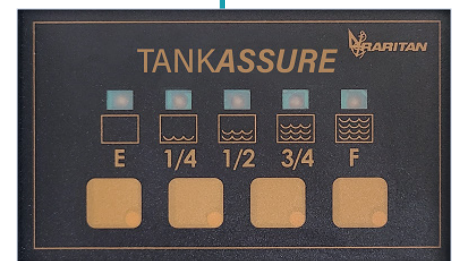

Dimensions

Inches [MM]

Submersible Sensor

Length	4" [105]
Diameter	1" [25]

Control Panel

Width	4" [121]
Height	3" [82]

With TankAssure, you can easily monitor your vessel's tank capacity using three methods.

The first method is through the control panel, which can be utilized as a primary control or to calibrate the sensor to match your tank.

The second method involves reading the tank capacity wirelessly through the Raritan App. This feature informs you of any full tanks, empty tanks, or blocked vents and provides an exact percentage readout of the tank capacity.

The third method will display on most Multifunction Displays when you purchase the NMEA2000. (Sold separately)

TankAssure is available in 12V or 24V the NMEA2000 adapter sold separately is only available in 12V.



For more information contact:
Raritan Engineering Company
530 Orange Street
Millville, NJ 08332

✉ info@raritaneng.com
☎ 856-825-4900
☎ 800-352-5630
☎ 856-825-4409